





# GTI<sup>®</sup> Composite Bar Chairs

**Primary Uses:** Single Mat Support - PT, Rebar or Wire Mesh  
Bottom Layer Double Mat Support - PT, Rebar or Wire Mesh  
Slab-on-Grade using a Sand Plate

**Sizes:** From 1/2" to 5 3/4" (1/4" increments)

- Features:**
- Feet that can be stapled
  - Points on legs ensure minimal surface contact
  - Designed for maximum aggregate flow and concrete consolidation
  - Will cradle all sizes of reinforcing bars

SIZE	PART NO.
1/2"	210050
3/4"	210075
1"	210100
1 1/4"	210125
1 1/2"	210150
1 3/4"	210175
2"	210200
2 1/4"	210225
2 1/2"	210250
2 3/4"	210275
3"	210300
3 1/4"	210325
3 1/2"	210350
3 3/4"	210375
4"	210400
4 1/4"	210425
4 1/2"	210450
4 3/4"	210475
5"	210500
5 1/4"	210525
5 1/2"	210550
5 3/4"	210575

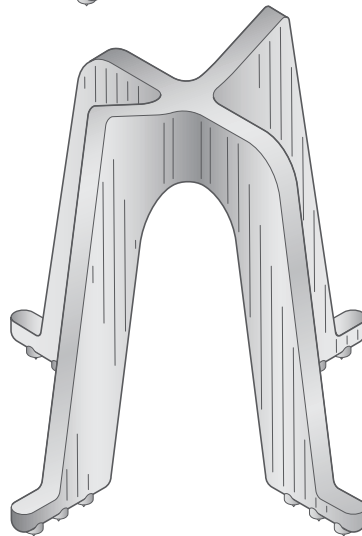

210 Series

### PRODUCT APPLICATIONS

DOT PC PT SOG SE

GTI<sup>®</sup> Composite Bar Supports comply with the Build America, Buy America Act (BABA) and all aspects of CRSI/ANSI RB4.1.

See [www.gti-usa.net/patents.shtml](http://www.gti-usa.net/patents.shtml) for a listing of many of the patents licensed to GTI<sup>®</sup>, including patents that may cover one or more of the products identified on this page.